

Number one in dry cornering*.

What it is: Track-ready ultra high performance tire with near race-level grip. Multi-time magazine showdown winner. The highest dry cornering mark (1.08g) one leading testing organization has ever recorded for a full tread depth street-legal tire*.

Who it's for: High-performance car owners and weekend track event competitors seeking absolute no-compromise, dry cornering performance.

* As of 6/10/04. For additional information go to www.bfgoodrichtires.com/g-Force.


Features:

- Low void asymmetric/directional tread design; dry/max handling optimized outboard (21% void); wet handling optimized inboard (31% void)
- Large, stable block elements
- Wide center ribs, flat crown profile, high contact surface ratio
- Proprietary BlackTech™ tread compound
- Reduced tread depth stabilizes tread, helps block and lower rotational mass
- Flat/oval footprint
- g-Control™ Sidewall Inserts help resist deflection
- Dimensionally-stable polyester carcass plies, ETEC System™ (Equal Tension Containment System)
- Rim protector

Benefits:

- Optimized for outstanding dry traction
- Enhanced stability, wear and handling under high torque loads^{††}
- Enhanced on-center feel^{††}
- Excellent wet and dry grip (UTQG traction grade=AA)
- Excellent handling^{††}
- Enhanced wet grip in shallow water depths, contributes to excellent treadwear potential for an ultra-high performance tire^{††}
- Generates tremendous cornering force
- Excellent strength, smooth ride, consistent footprint and maximized tread contact area under high-speed conditions
- Improved wheel damage protection^{††}
- Y-speed rated; capable of speeds up to 186 mph[†]



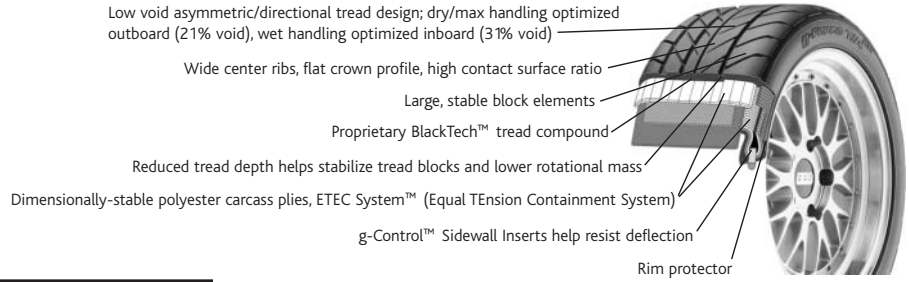

UTQG RATING:

Description	Treadwear	Traction	Temperature
g-Force T/A[®] KD			
All Sizes	200	AA	A

Tire Size	Serv. Desc.	Side	Sidewall	MSPN	Stock #	Rim Width Range (inches)	'Section Width on Measuring Rim Width ²	'Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load (lbs@psi)
205/50ZR15	86Y	LEFT	BSW	59612	505-204	5.5 - 7.5	8.4 on 6.5	23.2	9.0	894	1168@44
205/50ZR15	86Y	RIGHT	BSW	62462	501-204	5.5 - 7.5	8.4 on 6.5	23.2	9.0	894	1168@44
225/50ZR15	91Y	LEFT	BSW	72235	505-331	6.0 - 8.0	9.2 on 7.0	24.0	9.0	870	1356@44
225/50ZR15	91Y	RIGHT	BSW	73142	501-331	6.0 - 8.0	9.2 on 7.0	24.0	9.0	870	1356@44
205/55ZR16	89Y	LEFT	BSW	41369	134-324	5.5 - 7.5	8.6 on 6.5	25.0	9.0	835	1279@44
205/55ZR16	89Y	RIGHT	BSW	45551	176-324	5.5 - 7.5	8.6 on 6.5	25.0	9.0	835	1279@44
225/50ZR16	92Y	LEFT	BSW	94769	134-251	6.0 - 8.0	8.9 on 7.0	25.0	9.0	835	1389@44
225/50ZR16	92Y	RIGHT	BSW	40970	176-251	6.0 - 8.0	8.9 on 7.0	25.0	9.0	835	1389@44
205/40ZR17	80Y	LEFT	BSW	51281	134-346	7.0 - 8.0	8.3 on 7.5	23.5	9.0	886	992@44
205/40ZR17	80Y	RIGHT	BSW	84058	176-346	7.0 - 8.0	8.3 on 7.5	23.5	9.0	886	992@44
205/50ZR17	89Y	LEFT	BSW	77067	134-350	5.5 - 7.5	8.4 on 6.5	25.1	9.0	828	1279@44
205/50ZR17	89Y	RIGHT	BSW	69116	176-350	5.5 - 7.5	8.4 on 6.5	25.1	9.0	828	1279@44
225/45ZR17	90Y	LEFT	BSW	80786	134-354	7.0 - 8.5	8.9 on 7.5	25.0	9.0	833	1323@44
225/45ZR17	90Y	RIGHT	BSW	47198	176-354	7.0 - 8.5	8.9 on 7.5	25.0	9.0	833	1323@44
245/40ZR17	91Y	LEFT	BSW	41292	134-516	8.0 - 9.5	9.8 on 8.5	24.7	9.0	841	1356@44
245/40ZR17	91Y	RIGHT	BSW	85330	176-516	8.0 - 9.5	9.8 on 8.5	24.7	9.0	841	1356@44
245/45ZR17	95Y	LEFT	BSW	84805	134-136	7.5 - 9.0	9.6 on 8.0	25.7	9.0	811	1521@44
245/45ZR17	95Y	RIGHT	BSW	49823	176-136	7.5 - 9.0	9.6 on 8.0	25.7	9.0	811	1521@44
255/40ZR17	94Y	LEFT	BSW	52212	134-358	8.5 - 10.0	10.2 on 9.0	25.0	9.0	831	1477@44
255/40ZR17	94Y	RIGHT	BSW	78049	176-358	8.5 - 10.0	10.2 on 9.0	25.0	9.0	831	1477@44
275/40ZR17	98Y	LEFT	BSW	69380	134-132	9.0 - 11.0	10.9 on 9.5	25.7	9.0	811	1653@44
275/40ZR17	98Y	RIGHT	BSW	51992	176-132	9.0 - 11.0	10.9 on 9.5	25.7	9.0	811	1653@44
315/35ZR17	102Y	LEFT	BSW	51197	134-133	10.5 - 12.5	12.6 on 11.0	25.7	9.0	811	1874@44
315/35ZR17	102Y	RIGHT	BSW	55173	176-133	10.5 - 12.5	12.6 on 11.0	25.7	9.0	811	1874@44
225/40ZR18	88Y	LEFT	BSW	89089	134-353	7.5 - 9.0	9.1 on 8.0	25.1	9.0	829	1235@44
225/40ZR18	88Y	RIGHT	BSW	47378	176-353	7.5 - 9.0	9.1 on 8.0	25.1	9.0	829	1235@44
245/40ZR18	93Y	LEFT	BSW	55084	134-396	8.0 - 9.5	9.8 on 8.5	25.7	9.0	809	1433@44
245/40ZR18	93Y	RIGHT	BSW	72040	176-396	8.0 - 9.5	9.8 on 8.5	25.7	9.0	809	1433@44
265/35ZR18	93Y	LEFT	BSW	64630	134-361	9.0 - 10.5	10.7 on 9.5	25.3	9.0	821	1433@44
265/35ZR18	93Y	RIGHT	BSW	68154	176-361	9.0 - 10.5	10.7 on 9.5	25.3	9.0	821	1433@44
265/40ZR18	97Y	LEFT	BSW	98976	509-554	9.0 - 10.5	10.7 on 9.5	26.3	6.0	791	1609@44
265/40ZR18	97Y	RIGHT	BSW	90023	507-554	9.0 - 10.5	10.7 on 9.5	26.3	6.0	791	1609@44
275/40ZR18	99Y	LEFT	BSW	79085	509-465	9.0 - 11.0	10.9 on 9.5	26.7	9.0	780	1709@44
275/40ZR18	99Y	RIGHT	BSW	61653	507-465	9.0 - 11.0	10.9 on 9.5	26.7	9.0	780	1709@44
285/30ZR18	93Y	LEFT	BSW	81776	134-457	10.0 - 11.0	11.4 on 10.0	24.8	9.0	840	1433@44
285/30ZR18	93Y	RIGHT	BSW	40122	176-457	10.0 - 11.0	11.4 on 10.0	24.8	9.0	840	1433@44
295/35ZR18	99Y	LEFT	BSW	75795	134-345	10.0 - 11.5	11.9 on 10.5	26.1	9.0	797	1709@44
295/35ZR18	99Y	RIGHT	BSW	81286	176-345	10.0 - 11.5	11.9 on 10.5	26.1	9.0	797	1709@44

††Compared to Comp T/A ZR

- The dimensions shown are average values for tires measured on specified measuring rim width. Individual tires may vary from data shown.
- Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To assure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires and they should never inflate beyond 40 psi to seat beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.
DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

†For speeds over 136 mph, load and inflation must be adjusted according to the table below.

Y-Speed Rated Sizes:	136	143	149	155	161	168	174	180	186
Maximum Speed (mph)	136	143	149	155	161	168	174	180	186
Inflation Increase (psi)	0.0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	95	90	85

